

Specifications


- Steel Construction, Zinc Plated
- Buna-N "O"-Ring
- Air Flows to 64 cfm / 480 gpm

Options

- Available with 3/4" or 1-1/4" Male NPT attachment
- Available with 1" - 12", 1-1/2" - 16" Element attachment Thread to fit SF6500 & SF6700 Series Element



Dimensions

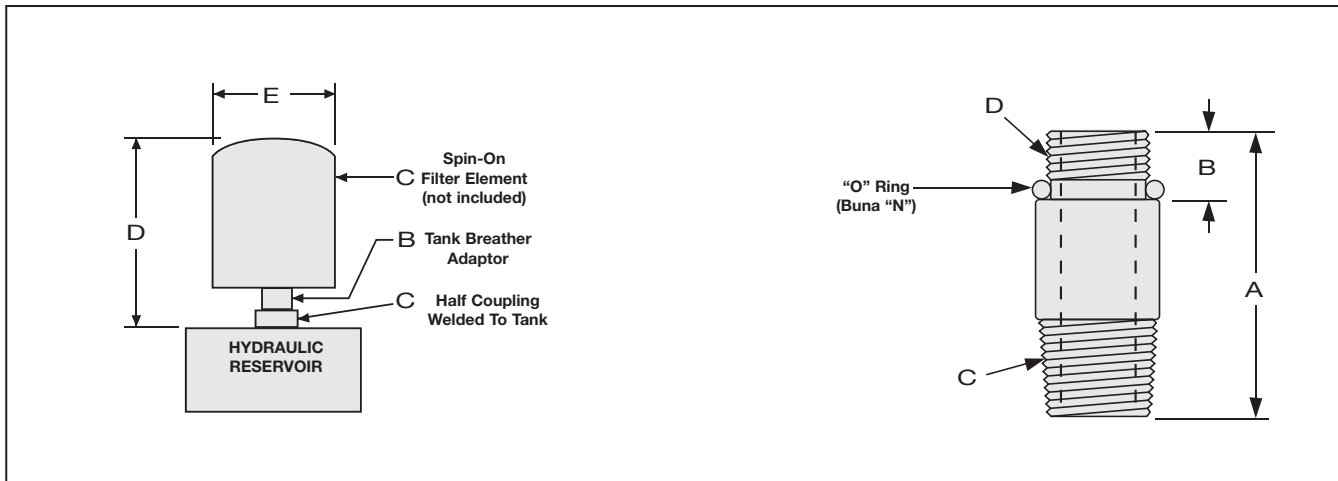

Filler Breather Adaptor	A		B		C Male Pipe Thread	D Element Attached Thread	Element Options	Micron Rating	Air Flow cfm/gpm
	mm	in	mm	in					
TBA-075	57.15	2.25	12.7	0.5	3/4" NPT	1" - 12 UNF	SF 6520/21	10µ	73/172
							SF 6549	3µ	20/47
TBA-120	7.62	3	12.7	0.5	1 1/4" NPT	1 1/4" BSP	SGB-120	3µ	55/395
							SFC-5710E	10µ	166/440
							SFC-5810E	10µ	166/440
TBA-125	76.2	3	12.7	0.5	1 1/4" NPT	1 1/2" - 16 UNF	SF 6720/21	10µ	159/440
							SF 6703/04	3µ	135/262

ACCESSORIES

Ordering Information

TBA - 075

Product	
TBA	Filler Breather Adaptor

Size	(Pipethread Adaptor / Element Port)		
075	3/4" NPT	/	1"-12 UNF
120	1 1/4" NPT	/	1 1/4" BSP
125	1 1/4" NPT	/	1 1/2"-16 UNF