


Specifications


- SAE O-Ring Threads for Leak-Free Installation
- Buna O-Ring Standard
- 125 Micron Stainless Wire Screen
- Flow Rates to 40 gpm
- Temperature to 100° (212°F)

Options

- 0.35 bar (5 PSI) By-Pass
- Weld Flange Available (WC Series - Page A7)
- Consult Factory for Special Screens and Threads

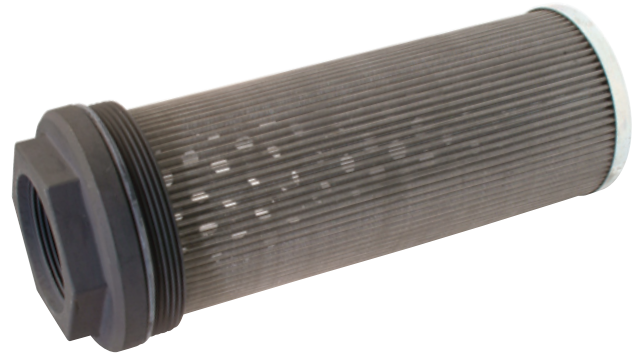

Dimensions

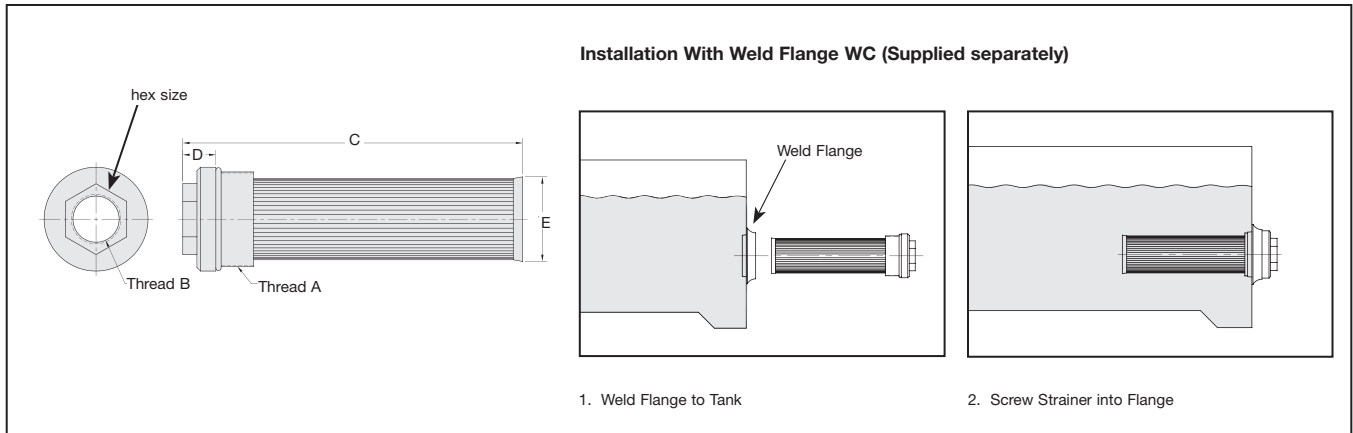

Ordering Information

Part No. Non-Bypass	Part No. Bypass	Thread (Per SAE J514)		C		D		E		Hex Size		Flow		Area	
		A	B	mm	in	mm	in	mm	in	mm	in	lpm	gpm	cm ²	sq. in
TMF-1625-0-0	TMF-1625-0-5	2 ¹ / ₂ "-12	1 ⁵ / ₁₆ "-12	229	9.0	19	0.75	58	2.3	54	2.1	34	9	580	90
TMF-2025-0-0	TMF-2025-0-5	2 ¹ / ₂ "-12	1 ⁵ / ₈ "-12	229	9.0	19	0.75	58	2.3	54	2.1	53	14	580	90
TMF-1834-0-0	TMF-1834-0-5	3 ³ / ₈ "-12	1 ⁷ / ₈ "-12	224	8.8	23	0.9	80	3.1	64	2.5	80	21	1484	230
TMF-2534-0-0	TMF-2534-0-5	3 ³ / ₈ "-12	2 ¹ / ₂ "-12	236	9.3	25	1.0	80	3.1	76	3.0	148	39	1484	230