


3000 PSI / 207 Bar Top Repairable

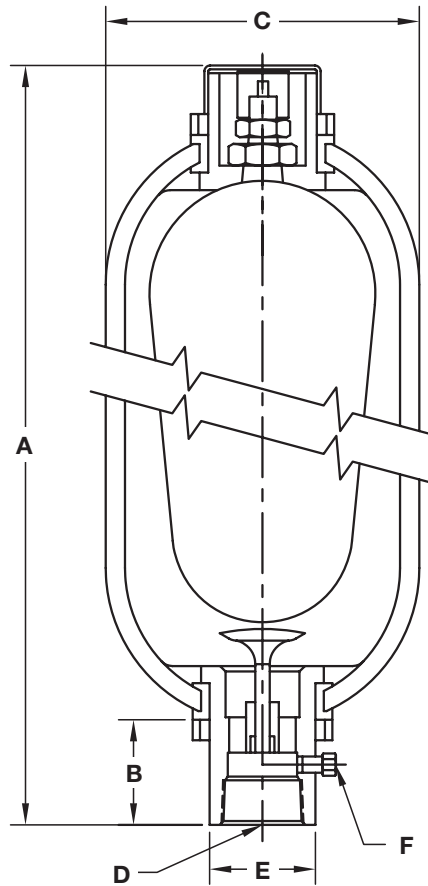

Installation Note:
Leave approximately 8" (200mm) for installation of gas charging valve.

Nominal Capacity Gallons (Liters)	Gas Volume in ³ (cm ³)	Maximum Working Pressure PSI (bar)	Dimensions										Net Weight	
			A		B		C		D	E		F	Kg.	Lbs.
			mm	in	mm	in	mm	in	SAE	mm	in	SAE		
2.5 (10)	555 (9620)	3000 (207)	546	21.50	94	3.70	229	9.00	SAE-24 (17/8"-12)	76	3.00	SAE-6 (9/16-18)	43	95
5.0 (20)	1095 (19480)	3000 (207)	838	33.00	94	3.70	229	9.00	SAE-24 (17/8" - 12)	76	3.00	SAE-6 (9/16 - 18)	63	139
10 * (40)	2080 (36560)	3000 (207)	1365	53.75	94	3.70	229	9.00	SAE-24 (17/8" - 12)	76	3.00	SAE-6 (9/16 - 18)	104	229
11 (44)	2360 (41210)	3000 (207)	1543	60.75	94	3.70	229	9.00	SAE-24 (17/8" - 12)	76	3.00	SAE-6 (9/16 - 18)	113	249
15 * (60)	3460 (56396)	3000 (207)	1969	77.50	94	3.70	229	9.00	SAE-24 (17/8" - 12)	76	3.00	SAE-6 (9/16 - 18)	130	286

* Consult Factory for Availability.