


## Flow Curves

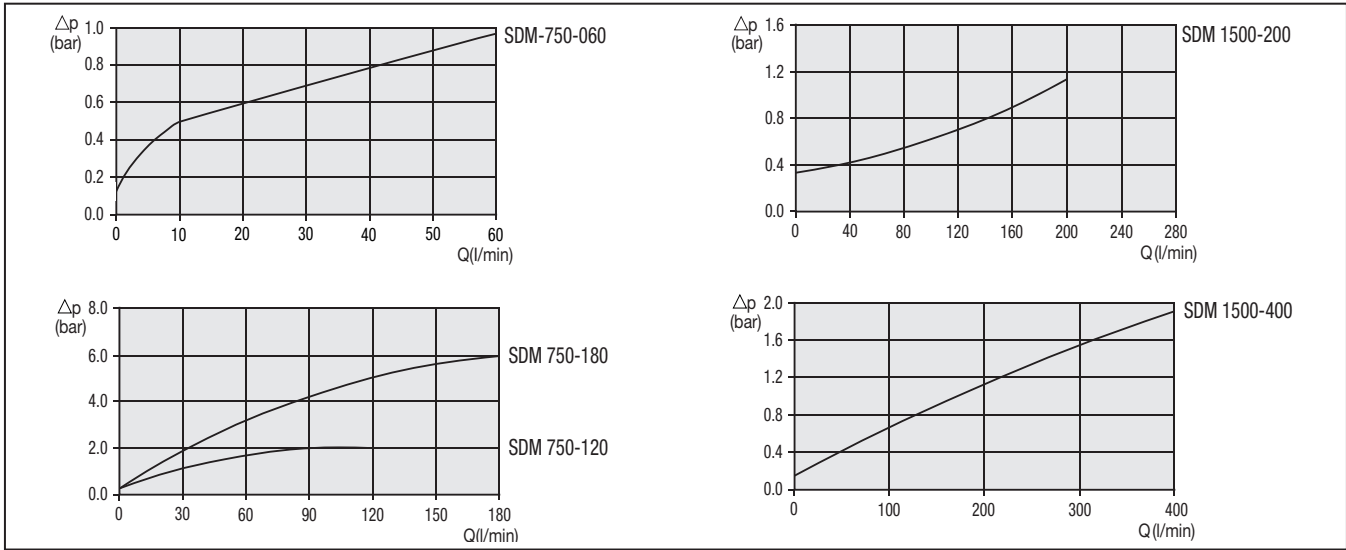

DIAGNOSTICS

## Ordering Code

**SDM 750N A 120 T**

Type	
SDM	Flow Indicator

Size	
750	Size 750N (3/4" NPT)
1500	Size 1500S (1-7/8" - 12 SAE)

Housing	
A	Aluminum
B	Bronze (special order)


Thermometer	
T	with integrated thermometer (standard)

Flow	
060	0.8 - 16 gpm (3 - 60 lpm) - size 750
120	1.3 - 32 gpm (5-120 lpm) - size 750
180	2.6 - 47 gpm (10-180 lpm) - size 750
200	2.6 - 53 gpm (10-200 lpm) - size 1500
400	8 - 105 gpm (20-400 lpm) - size 1500

## Flowtell In-Line Flow Meters

### Specifications

- Accuracy Flow: ±2.5% of full scale in mid-third of flow range  
±4.0% over entire flow range
- Repeatability: ±1% of full scale
- Max. Operating Pressure: 3500 PSI (240 bar)
- Max. Operating Temperature: 240°F (116°C)
- Material: Aluminum end Caps, Polycarbonate Window Tube, Buna-N and Teflon Seals
- Suitable for Mineral-Based Hydraulic Fluid



Model No.	Port Size	Flow Range	Dimensions	
			A	B
FTBAGHB-05	1/2" NPT	0.5-5 GPM	1.88" (48 mm)	6.56" (167 mm)
FTBAGHC-30	3/4" NPT	3-30 GPM	2.38" (60 mm)	7.16" (182 mm)
FTBAGHK-75	1 1/4" NPT	8-75 GPM	3.5" (90 mm)	10.13" (258 mm)