

LasPaC II - Portable

The LasPaC II portable unit is the most complete way to measure the contamination level of your system.

With the LasPaC II-P you have the ability to measure, analyze, and document your results immediately without the need of any additional equipment.



Side view of the STAUFF LasPaC II-P

Quick results → Fast results and easy operation

The integrated complete QWERTY keyboard, a large LCD display, and intuitive handling all lead to the easy and quick operation of the LasPaC II Portable.

The optimized flushing process of the LasPaC II-P is quick and effective, and allows for continuously accurate measurements.



Light-weight rugged industrial case

Black and white → Integrated Printer

The integrated printer in the LasPaC II-P supports printouts in the field, thus providing immediate documentation. Every printout confirms date and time of your measurement.




Front view of the STAUFF LasPaC II-P

Independent use → Rechargeable battery mode

The integrated rechargeable battery of the LasPaC II-P allows for the use of on site measurements, even in the event where access of an external power source is not available.

The measurement data is stored in the internal memory of the unit and can be transferred to a computer when required.

Once charged the LasPaC II-P can run 100 tests before recharging is needed again.

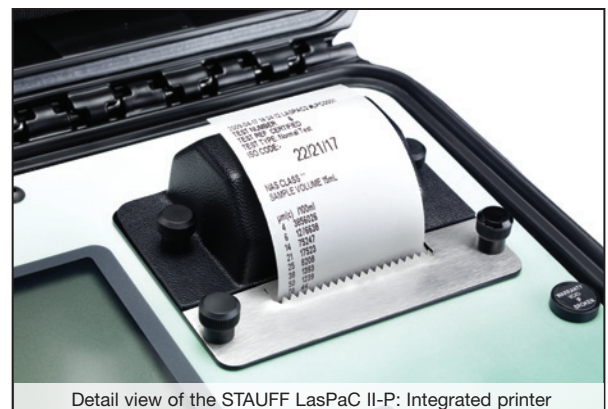

Detail view of the STAUFF LasPaC II-P: Integrated printer