


Software (optional)

The standard software allows the download and the visualization of the measured particle distribution. Upon request a special software is available that allows the customer to control, monitor and analyze

more than one LPM which are connected in a network. For custom configuration, please contact your local STAUFF partner.

Ordering Code

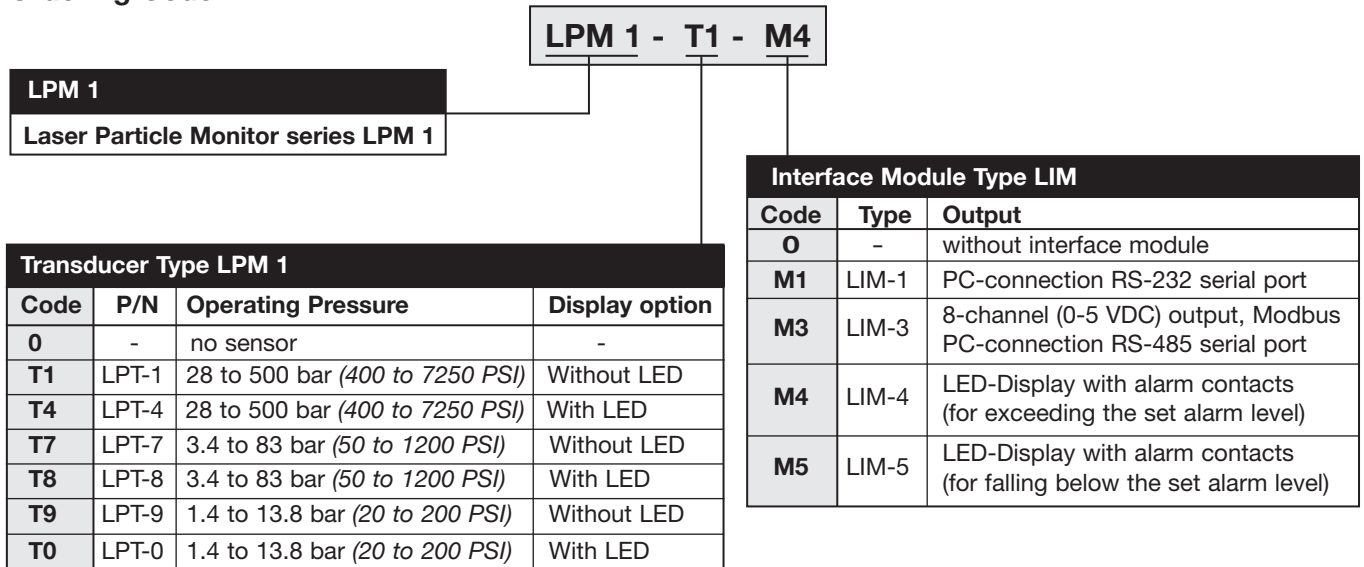

Each LPM 1-Kit includes:

- 1 x LPT Laser Particle Transducer
 - includes 3 m (10 ft.) flying lead power cable (9 to 36 VDC required, not supplied)
- 1 x LIM Interface module
 - LIM-1, includes 6 m (20 ft.) interconnecting fiber optic cable
 - LIM-3, includes 6 m (20 ft.) interconnecting fiber optic cable and two 3 m (10 ft.) power cable with 3 pin connector.
 - LIM-4, includes 6 m (20 ft.) interconnecting fiber optic cable and one breakout cable with 15 pin connector
 - LIM-5, includes 6 m (20 ft.) interconnecting fiber optic cable and one breakout cable with 15 pin connector
- 1 x Quick Start Guide
- 1 x Operators Manual
- 1 x Software
 - Includes DDE server
 - Hex and terminal logger for RS-232
 - PDA Shareware