Return Line Filter TEF950 Series

Specifications

- Flows to 250 gpm (950 lpm)
- 3" SAE Flange (3000 PSI) Port Connection
- Working Pressure 145 PSI (10 bar)
- All elements are β200 rated
- Steel bowl
- By-Pass in filter element 29 PSI (2 bar)
- Normal operating temperature
  -14˚F to 176˚F (-25˚C to 80˚C)

Options

- 3, 10, 25 Micron glass fiber elements
- Stainless steel mesh available on special request
- Buna-N or Viton Seals
- Visual and Electrical Indicators available

Dimensions

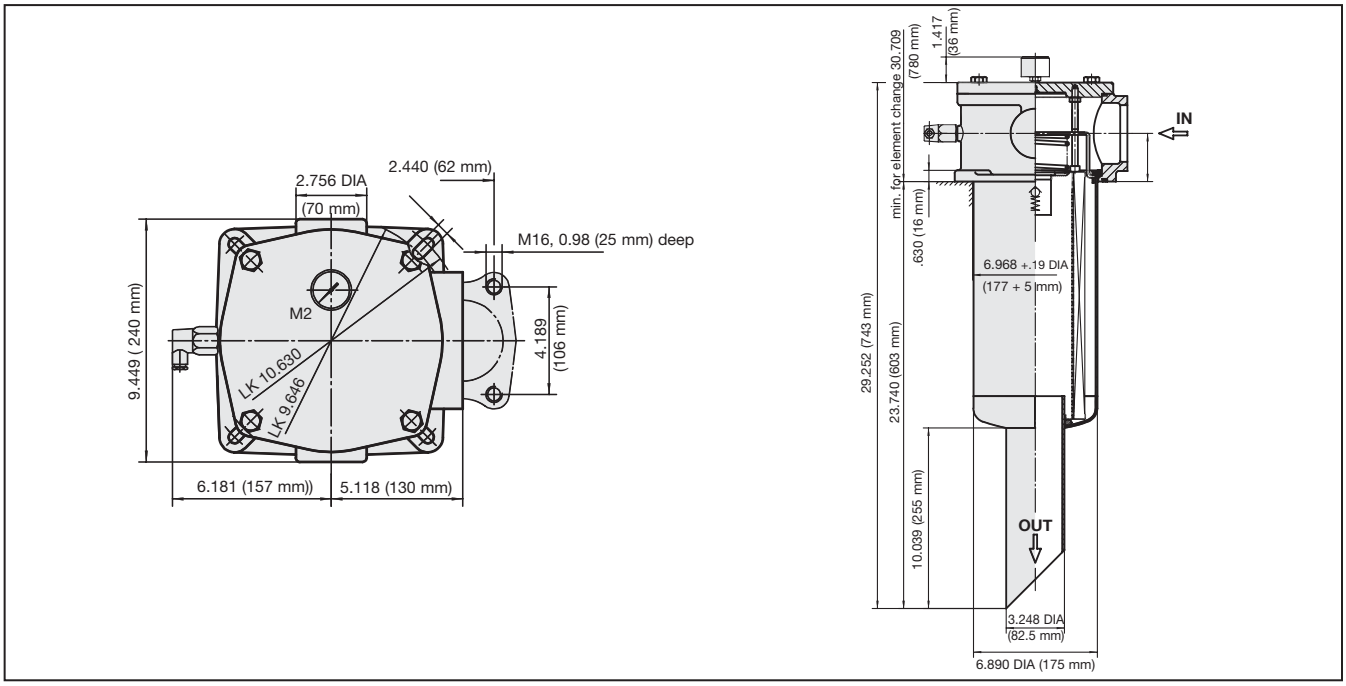

Ordering Information

TEF 951 10VG10 S B V

Filter Type	TEF - In Tank Return

Nominal Flow	
951	250 GPM-950 LPM

Ordering Code - Filter Elements	
03VG.10 S	3 Micron inorganic fiber
10VG.10 S	10 Micron inorganic fiber
25VG.10 S	25 Micron inorganic fiber

Replacement Filter Elements	
01.E.950.3VG.10 S P	3 Micron inorganic fiber
01.E.950.10VG.10 S P	10 Micron inorganic fiber
01.E.950.25VG.10 S P	25 Micron inorganic fiber

Clogging Indicator	
V	Visual
E1	Electrical

Seal Material	
B	NBR (Buna-N®)
V	FPM (Viton®)

FILTRATION